


Pin front view

Rated
voltage

Rated
current


Part No.



60V

4A


6208-639-203



30V

4A


6208-639-204



30V

4A



6208-639-205



30V


1.5A

6208-639-208

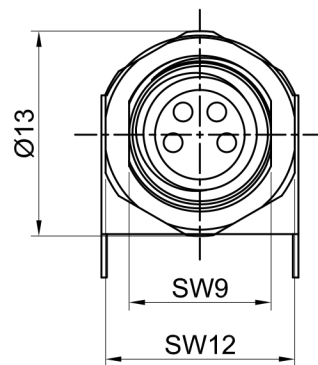

Panel Cut-Out

Revisions			
Rev.	Description	ECN No.	Date

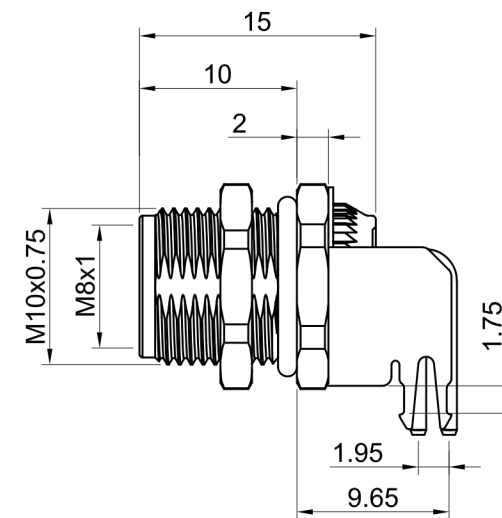

General Specifications

Connector locking system:

Termination:

Temperature range:

Mating cycles:

Degree of protection:

Screw

Dip Solder

-40°C ~ +85°C

> 100

IP67 when mated

Contact:

Contact plating:

Housing:

Base shell:

Hex nut:

Shielding:

Sealing:

Adhesive:

CuSn

Gold plated

PA66+GF

CuZn nickel plated

CuZn nickel plated

CuZn nickel plated

FKM/NBR

Epoxy



THIRD ANGLE

GENERAL TOLERANCE
(UNLESS SPECIFIED)

< 1.5: ±0.05

1.5~10: ±0.1

>10: ±0.2

NAME

DATE

MATERIAL:

VOLUME:

MASS:

DRAWN

CHECKED

RELEASE

TITLE

M8 FEMALE RIGHT ANGLED PCB

PART NO.

DWG NO.

ED-948-348

UNIT

REV.

SIZE

SHEET

MM

B

A4

1 OF 1

